
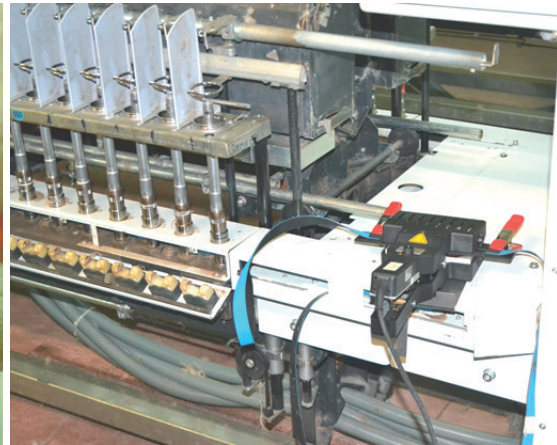


# RAPPLON® QSP 60 LF plus

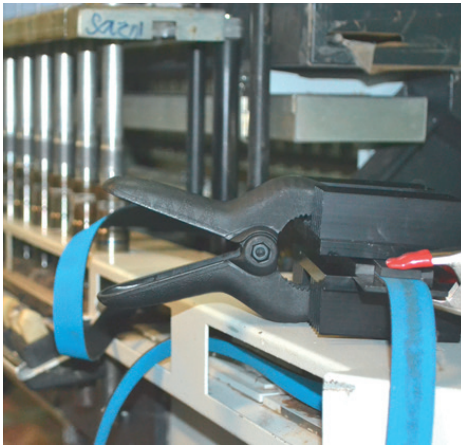


QuickSplice heating pliers with adjustable temperature settings for splicing 110mm fingers as used in the textile industry.

#### **Main features**

- Quickest system available
- Joining within minutes
- Unique guide rail system
- Adjustable temperature settings
- Maximum 60mm belt width
- Pressure adjustable
- Swiss made

## Description



Splicing tool QSP 60 LF plus for on-site hot-pressing of thermoplastic belts and tapes for long fingers as used in the textile industry.

### Technical Data

Dimensions	310x150x105 mm
Weight	1.7 kg
Maximum working area	120 x 60 mm
Maximum belt width	60 mm
Maximum belt joint length	110 mm
Maximum belt thickness	5 mm
Temperature range	105°C/ 180°C/ 185°C/ 190°C/ 195°C/ 205°C

Art. No.	Description	Voltage	Plug
615800	QSP 60 LF plus heating press	230	EUR
615801	QSP 60 LF plus heating press	110	US
615802	QSP 60 LF plus heating press	230	CH

## RAPPLON® QSP 60 LF plus & MFT 60 set



### Main features:

- Quickest system available
- All necessary tools in a portable case
- For preparing and splicing QS-Tangential flat belts on-site Inclusive 110/10 mm die

Guide rails are available separately.

Art. No.	Description	Voltage	Plug
615820	QSP 60 LF plus & MFT 60 set	230	EUR

## RAPPLON® QSP 60 LF plus set



### QSP 60 LF plus set contains:

- QSP 60 LF heating press
- CP 60 LF cooling pliers
- Digital timer
- Holder
- Clamps
- Timer
- Space for 6 guide rails
- Case with foam inlay incl. manuals


Art. No.	Description	Voltage	Plug
615810	QSP 60 LF plus set	230	EUR
615811	QSP 60 LF plus set	110	US
615812	QSP 60 LF plus set	230	CH

## RAPPLON® LF guide rail and cover plate

**LF guide rail and cover plate for the QSP 60 LF plus when the conventional guide rail does not fit. To endless our RAPPLON® QS-Tangential flat belt, which is used in ring spinning and yarn twisting applications we recommend using the long finger guide rail and cover plate.**

Art. No.	Description	Width
616030-10	LF guide rail without cover plate	10 mm
616030-20	LF guide rail without cover plate	20 mm
616030-30	LF guide rail without cover plate	30 mm
616030-40	LF guide rail without cover plate	40 mm
616030-50	LF guide rail without cover plate	50 mm
616030-XX	LF guide rail customized at individual width	11-19 mm
616030-XX	LF guide rail customized at individual width	21-29 mm
616030-XX	LF guide rail customized at individual width	31-39 mm
616030-XX	LF guide rail customized at individual width	41-49 mm
616030-XX	LF guide rail customized at individual width	51-60 mm

Art. No.	Description	Width
616040-10	LF cover plate only	10 mm
616040-20	LF cover plate only	20 mm
616040-30	LF cover plate only	30 mm
616040-40	LF cover plate only	40 mm
616040-50	LF cover plate only	50 mm
616040-XX	LF cover plate only at individual width	11-19 mm
616040-XX	LF cover plate only at individual width	21-29 mm
616040-XX	LF cover plate only at individual width	31-39 mm
616040-XX	LF cover plate only at individual width	41-49 mm
616040-XX	LF cover plate only at individual width	51-60 mm



**Expert advice and quality solutions for all your belting needs.**  
ammeraalbeltech.com

**Ammeraal Beltech**  
Ammeraal Beltech Inc.  
Skokie, Illinois

This information is subject to alteration due to continuous development. Ammeraal Beltech will not be held liable for the incorrect use of the above stated information. This information replaces previous information. All activities performed and services rendered by Ammeraal Beltech are subject to general terms and conditions of sale and delivery, as applied by its operating companies.

Member of Ammega Group.

T +1 800 533 3765  
info-us@ammeraalbeltech.com

**ammerga.com**